


CRFV 1200


Vertical display freezers [ventilated] with auto defrost



-15/-25°C 



CRFV 1200
1370 x 760 x 2080
1163lt

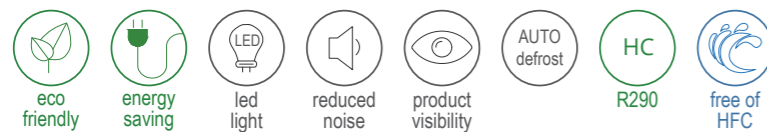

Advantages

- High aesthetics
- Ideal for promoting frozen products
- Selected by leading companies in the ice cream sector
- Maximum use of limited spaces
- Large display area optimum product promotion
- Robust for heavy duty-use
- Plug ready



Basic Equipment

- Two Hi efficiency compressors
- Ventilated refrigeration
- Digital controller
- Automatic fan switch off with door opening.
- High temperature alarm
- Automatic defrost
- 10 adjustable reinforced shelves + floor selve
- Internal LED light
- Operation switch
- Antidazzle triple glass door
- Two regulators
- Four castors
- Self closing door
- Easily removable grille
- Air cooled condenser
- Internal body from non toxic pre-painted steel sheet
- Decompression valve for easy door opening



Optional Equipment

- Shelves
- Maintenance free condenser
- EBD electronic fan motor (compressor)
- Branding
- Remote Controller:
 1. Online temperature (The temperature of the device is available on the mobile device of the user through the app or the e-mail)
 2. Temperature history (The user has access to the temperature history of the device through the app)
 3. Alarm (The user receives an alarm on the mobile device in the unlikely event of power failure or malfunction of the device)
 4. Export reports to PDF or CSV (Excel).



Technical Specifications

TECHNICAL SPECIFICATIONS	UNITS	CRFV 1200
External dimensions (lxwxh)	mm	1370 x 760 x 2080
Internal dimensions (lxwxh)	mm	1248 x 585 x 1593
Packing dimensions (lxwxh)	mm	1380 x 780 x 2180
Internal gross volume	lt	1163
Temperature range	°C	-15 / -25
Energy consumption	kW/24h	19,320
Gross / net weight	kg	270 / 259
Climate class	-	4L1
Pieces per truck 13.6m	-	28
Pieces per 20/40'ft container	-	12 / 25
Refrigeration	-	AIR COOLED
Refrigerant	-	R290

*The energy consumption concerns specific metrics