


Vertical display cooler




+2/+7°C



CR 300
530 x 595 x 1793
314lt



CR 400
667 x 595 x 1793
410lt

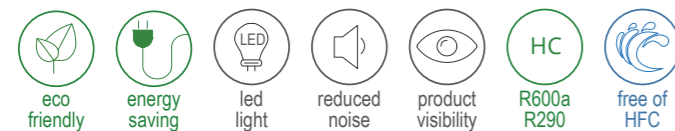

Advantages

- Ideal for the conservation and promotion of bottled and packed products.
- Top cooling capacity ideal for perishable products.
- Selected by leading companies in the dairy and beverage sector
- Ideal for heavy duty and outdoors use.
- Shelving solutions suitable for each customer's needs.
- Ideal for small places.
- Reliable and functional
- Optimum product visibility.
- Plug ready



Basic Equipment

- Hi efficiency compressor
- EBD electronic Fan motor (evaporator)
- Thermometer
- Internal LED lighting
- Operation switch
- Self closing doors
- Four castor wheels
- 4 Adjustable reinforced shelves
- Mechanical thermostat
- Special antidazzle double glass
- Easily removable grill
- Air cooled condenser
- Two regulators
- Automatic defrost
- Drainage
- Internal body from non toxic pre painted steel sheet



Optional Equipment

- Shelves
- Product labeling and price tags
- Digital controller
- Automatic fan switch off with door opening.
- EBD electronic fan motor (compressor)
- Branding



Technical Specifications

TECHNICAL SPECIFICATIONS	UNITS	CR300	CR400
External dimensions (lxwxh)	mm	530 x 595 x 1793	667 x 595 x 1793
Internal dimensions (lxwxh)	mm	450 x 510 x 1368	587 x 510 x 1368
Packing dimensions (lxwxh)	mm	535 x 657 x 1879	680 x 657 x 1879
Internal gross volume	lt	314	410
Capacity of 330ml cans	pcs	254	468
Temperature range	°C	+2/+7	+2/+7
Gross / net weight	kg	81 / 74	85 / 77
Energy consumption*	kW/24h	3.44	3.83
Pieces per truck 13.6m	-	80	60
Pieces per 20/40'ft container	-	35 / 72	24 / 54
Refrigeration	-	AIR COOLED	AIR COOLED
Refrigerant	-	R290/R600a	R290/R600a

*The energy consumption concerns specific metrics