

Vertical display cooler




+2/+7°C



CR 500
667 x 620 x 2018
477lt



CR 600
667 x 716 x 2018
567lt

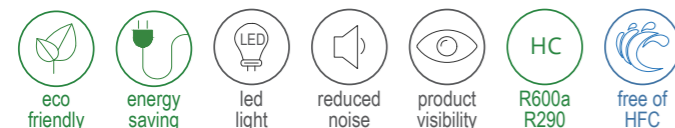

Advantages

- Ideal for the conservation and promotion of bottled and packed products.
- Top cooling capacity ideal for perishable products.
- Selected by leading companies in the dairy and beverage sector
- Ideal for heavy duty and outdoors use.
- Shelving solutions suitable for each customer's needs.
- Reliable and functional
- Optimum product visibility.
- Plug ready



Basic Equipment

- Hi efficiency compressor
- EBD electronic fan motor (evaporator)
- Thermometer
- Self closing doors
- Led Internal lighting
- Operation switch
- Led illuminated canopy
- Four castor wheels
- 5 adjustable reinforced shelves
- Mechanical thermostat
- Special antidazzle double glass
- Easily removable grill
- Air cooled condenser
- Two regulators
- Automatic defrost
- Drainage
- Internal body from non toxic pre painted steel sheet



Optional Equipment

- Shelves
- Product labeling and price tags
- Digital controller
- Automatic fan switch off with door opening.
- EBD electronic fan motor (compressor)
- Branding



Technical Specifications

TECHNICAL SPECIFICATIONS	UNITS	CR 500	CR 600
External dimensions (lxwxh)	mm	667 x 620 x 2018	667 x 716 x 2018
Internal dimensions (lxwxh)	mm	587 x 510 x 1593	587 x 566 x 1593
Packing dimensions (lxwxh)	mm	680 x 657 x 2104	680 x 752 x 2104
Internal gross volume	lt	477	567
Capacity of 330ml cans	pcs	636	812
Temperature range	°C	+2 / +7	+2/+7
Gross / net weight	kg	110 / 102	116 / 107
Energy consumption*	kW/24h	3.64	3.86
Pieces per truck 13.6m	-	60	57
Pieces per 20/40'ft container	-	24 / 54	24 / 51
Refrigeration	-	AIR COOLED	AIR COOLED
Refrigerant	-	R290/R600a	R290/R600a

*The energy consumption concerns specific metrics