



Vertical display freezer [ventilated] with auto defrost



-15/-25°C 



CRFV 2000
2040 x 768 x 2077
1786lt

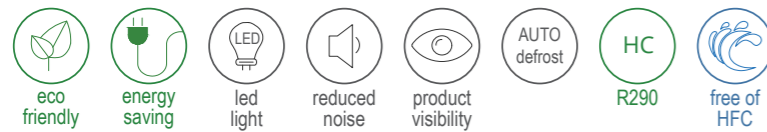

Advantages

- High aesthetics
- Ideal for Super markets – mini markets – Convenience stores
- Maximum utilization of product loading space
- Large display area optimum product promotion
- Robust for heavy duty-use
- Plug ready



Basic Equipment

- Two Hi efficiency compressors
- Ventilated refrigeration
- EBD Electronic fan motors
- Digital controller – thermometer
- Automatic fan switch off with door opening.
- High temperature alarm
- Automatic defrost
- 15 adjustable reinforced shelves + floor selve
- Price tags
- Internal LED light
- Antidazzle triple glass door
- Three regulators
- Four castors
- Self closing doors
- Easily removable grille
- Air cooled condenser
- Internal body from non toxic pre-painted steel sheet
- Decompression valve for easy door opening



Optional Equipment

- Shelves
- Branding
- Remote Controller:
 1. Online temperature (The temperature of the device is available on the mobile device of the user through the app or the e-mail)
 2. Temperature history (The user has access to the temperature history of the device through the app)
 3. Alarm (The user receives an alarm on the mobile device in the unlikely event of power failure or malfunction of the device)
 4. Export reports to PDF or CSV (Excel).



Technical Specifications

TECHNICAL SPECIFICATIONS	UNITS	CRFV 2000
External dimensions (lxwxh)	mm	2040 x 768 x 2077
Internal dimensions (lxwxh)	mm	1920 x 585 x 1593
Packing dimensions (lxwxh)	mm	2060 x 774 x 2180
Internal gross volume	lt	1786
Temperature range	°C	-15 / -25
Energy consumption	kW/24h	29,040
Gross / net weight	kg	369 / 346
Climate class	-	4L1
Pieces per truck 13.6m	-	19
Pieces per 20/40'ft container	-	7 / 15
Refrigeration	-	AIR COOLED
Refrigerant	-	R290

*The energy consumption concerns specific metrics